



Product Information:

serve and in crib situations

Designed for up to 3 hours continuous use

Supplied with stainless steel covers for the cold well

+4°C in a maximum of 32°C ambient temperature

CR.IB.CLCBF.GCP.6 Island Buffet

Refrigerated - Heavy-duty

Product Code:

CR	Culinaire Refrigerated
IB	Island Buffet
CLCBF	Chillair Cold Well Bar - Fan Forced
GCP	Gantry - Chillair - Perspex

6 Modules

6

Optional Extras:

6 Module Tray Race


2 sections per side 4 sections required for a tray race to each side

Technical Data:

Dimensions: W x D x H: Total Connected Load: Electrical Connection:

2161 x 750 x 1525 1.44kW 10A plug & lead fitted

CR.IB.CLCBF.TR.6

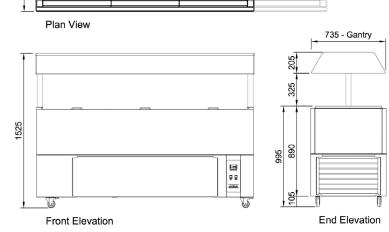

All Culinaire products are supplied with a 12 month parts and labour warranty as standard.

Due to continuous product research and development, the information contained herein is subject to change without notice. Revision: September 2, 2020 - F





PH: 08 9302 1299 51 Paramount Dr Wangara WA 6065 sales@practicalproducts.com.au www.practicalproducts.com.au

blowing across the top of the pans) Fitted with a stainless steel gantry support frame and light surround • Angled perspex gantry fitted with fluorescent lights • Fully insulated and constructed from 304 grade stainless steel with a No.4 finish Self-contained refrigeration with removable container for condensate water collection (no plumbing to waste required). Condensate container to be emptied between service periods •

Heavy-duty non-marking 75mm swivel castors Supplied as standard with 65mm deep gastronorm pans

Suits gastronorm pans up to 100mm deep (sold separately). •

2161 - Gantry

2144

A practical and attractive solution to the presentation and holding of food for self-

Adjustable digital temperature controller allows food to be held between +2°C to

• The blown air design passes cold air over and under the food pans creating an even cooling effect (product in the pans must not restrict the cold air flow stream

Food to be removed and unit switched off between service periods

