

## PRODUCT FEATURES

- Individual premium crescent cube with no ice bridging.
- Exceptionally hard crystal clear cubes that melt slowly.
- Durable stainless steel exterior.
- Slide in air filter at front for easy cleaning - maintaining performance efficiency.
- Double-sided stainless steel evaporator for all water conditions - produces more ice in less cycles.
- Flush mount to rear wall.
- Good in hard water areas.
- Snap in water tank design - easy to remove for sanitization.
- Low electrical consumption.
- Low water consumption.
- 3 year parts and labour warranty on entire unit.


## CUBE SIZE:



**WA DEALER**  
**PRACTICAL PRODUCTS PTY LTD**

PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au

## TECHNICAL DRAWING

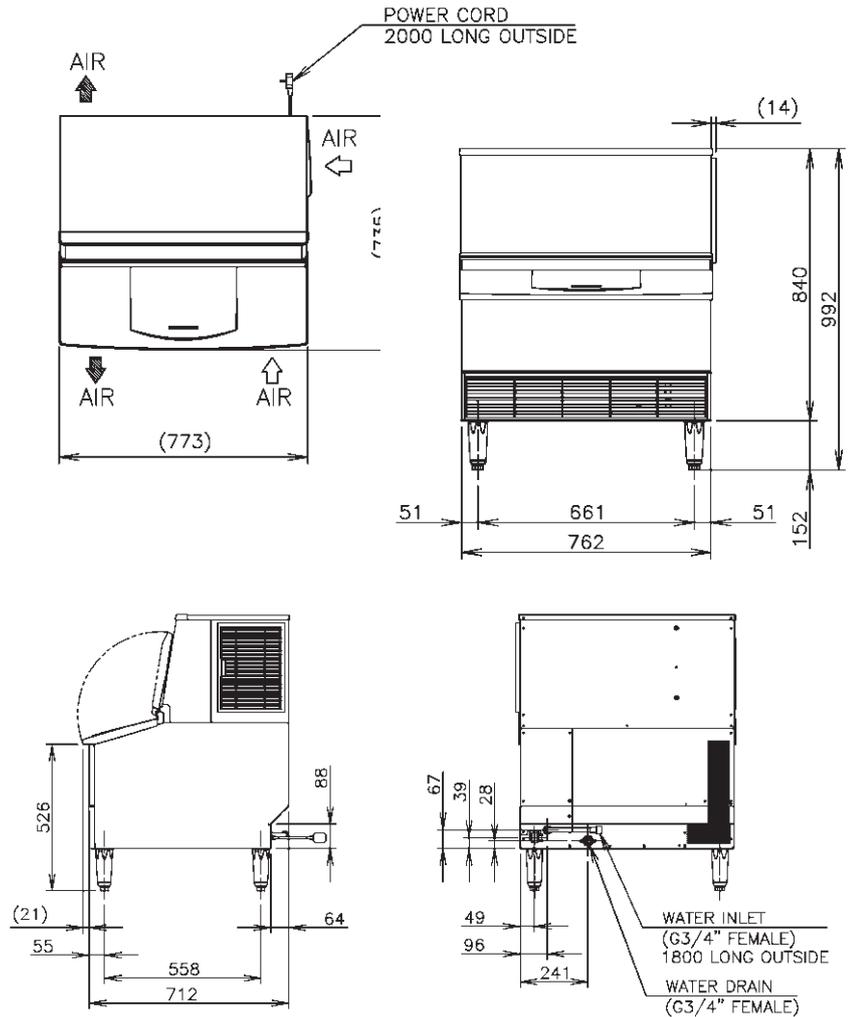

## PRODUCT SPECIFICATION

<b>Production Capacity per 24hours</b>	Approx. 138kg @10°C Air temp; 10°C Water Approx. 126kg @21°C Air temp; 15°C Water Approx. 100kg @32°C Air temp; 21°C Water
<b>Max Storage Capacity</b>	Approx. 55kg(Bin Cont Setting Approx. 45kg)
<b>Freeze Cycle Time</b>	Approx. 23 Min
<b>Ice Production Per cycle</b>	Approx. 2.15kg/238pcs
<b>Dimensions</b>	762mm (W) x 712mm (D) x 992mm (H)(Height includes 152mm)
<b>Cooling</b>	Air
<b>Weight Net/Gross (kg)</b>	70 / 92
<b>AC Supply Voltage</b>	1 PHASE 220-240V 50Hz / 10Amp Plug
<b>Amperage</b>	Rated:4.2A Starting: 18.3A
<b>Refrigerant Charge</b>	R404A / 370g
<b>Operating Conditions</b>	Ambient Temp.: 1- 40°C Water Supply Temp.: 5-35°C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: ± 6%

