

MF Series Modular Flake Ice Maker – up to 265kg

MF 47 AS OX Superflake ice



Superflake ice



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.


- Up to 265kg daily production rate
- Head only ice maker: requires a separate storage bin to store the ice produced
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- XSafe - Natural Sanitation System
- Air cooled version
- Hydrocarbons R290 refrigerant gas
- Hermetic compressor
- Stainless steel auger and freezing cylinder (evaporator)
- Simple, reliable electromechanic controls
- Double protection – electronic rotation sensor & drive coupling
- Low-water sensor protection
- Stainless steel finish, top cover in PS plastic with removable panels for ease of maintenance
- Includes removable air filter, water and drain hose

Recommended Storage Bins

- NB 193 with CBT 22 EFCD cover – 129kg storage capacity
- NB 393 with CBT 30 EFSD cover – 178kg storage capacity
- NB 530 with CBT 30 EFSD cover – 243kg storage capacity
- NB 948 with CBT 48 FMCD cover – 406kg storage capacity

MF Series Modular Flake Ice Maker – up to 265kg

MF 47 AS OX

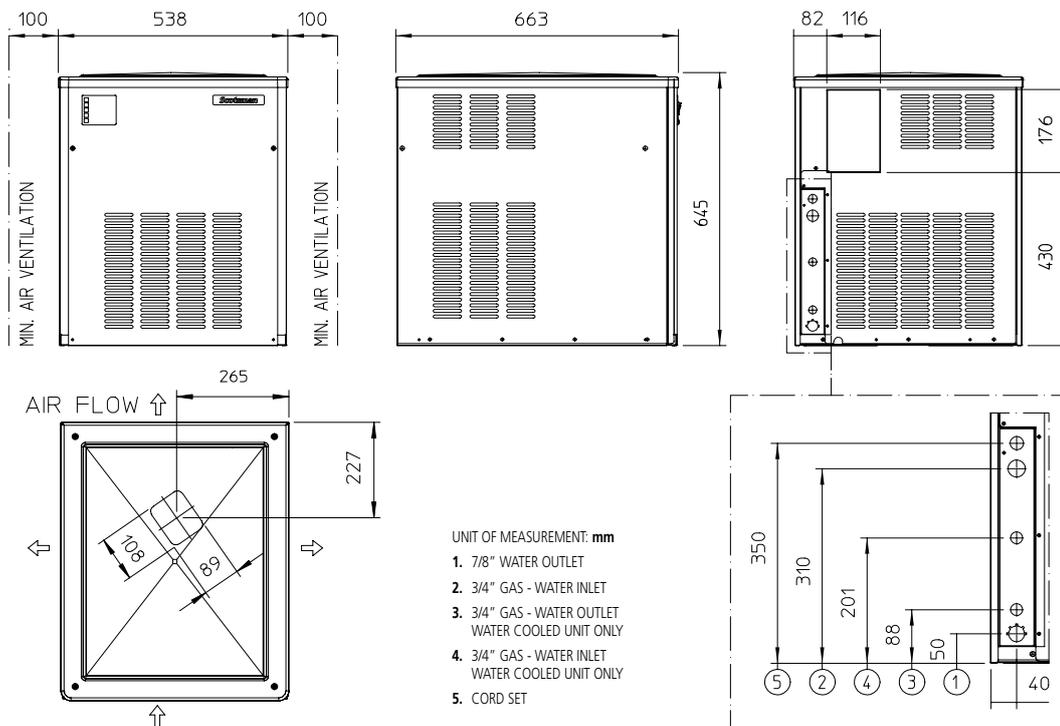

Ice production per 24 hours

Ambient temperature / Water temperature

| 10°C / 10°C | 21°C / 10°C | 32°C / 21°C |
|-------------|-------------|-------------|
| 300 | 265 | 200 |

Dimensions

| | |
|----------------|-------|
| Width: | 538mm |
| Depth: | 663mm |
| Height: | 645mm |
| Nett weight: | 78kg |
| Packed weight: | 87kg |

Water consumption

Air cooled version: 8.3 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 1000W,
15A cordset supplied

No. Circuit wire: 3
Compressor: 830W
Energy consumption: 22.7kW/24hr

Refrigerant type

R290

Installation distance from wall

Rear 100mm
Sides 150mm

Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: Ø3/4"

