

specifications


BME1200N-A Series

ActiveCore Series, 2 Door (Glass), Upright Fridge



Project: _____

Item No: _____

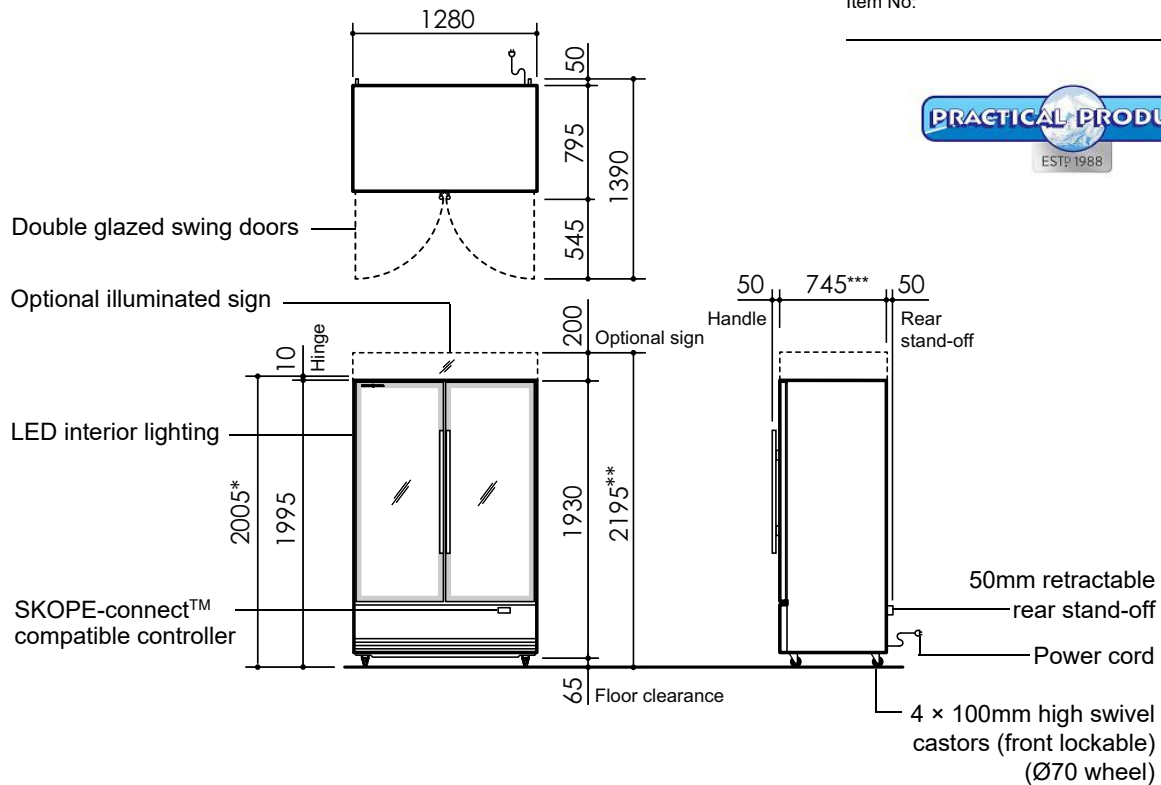

CABINET

Model ID	BME1200N-A	BME1200N-AC
Doors	2 × self-closing, double glazed, single Low-E, lockable, argon filled, toughened safety glass swing door (hinged LH, RH)	
Internal door opening	2 × door openings: 1454mm high × 525mm wide	
Shelves	8 × wire and 2 × stainless steel	10 × wire and 2 × stainless steel
	Wire shelves: Adjustable height, 577mm wide × 520mm deep	
	Stainless steel bottom shelf: Not adjustable, 580mm wide × 515mm deep	
Sign	n.a.	Illuminated sign
Material	Powdercoat galvanized steel	

PERFORMANCE

Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
GEMS class	M1
GEMS energy consumption	3.37 kWh/24h
GEMS annual running cost	\$369 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class	5
Interior side lighting	2 × 1370mm, 15W LED
Sign lighting	n.a.
Power cord	Supplied with 2.0m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	3.0 Amps (includes unit 2.6 Amps)

REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth
Refrigeration system	Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-0008)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	145 Watts/195 Watts
Drainage	No plumbing required

DIMENSIONS

	External	Internal
Height	2005mm* / 2195mm**	1454mm
Width	1280mm	1180mm
Depth	795mm	602mm
Floor area	1.08m ²	
Weight	245kg	
Gross volume	1079 L	

* Height 2005mm without sign (BME1200-A)

** Height 2195mm with sign (BME1200-AC)

*** Depth 745mm excludes removable door handle, door lock bracket and rear stand-off

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	50mm
Sides	Not required
Back	50mm
Bottom	50mm

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

PSS0521 Rev. 2.4 Jul. 2020

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au

