
specifications





PG250Prepr-2

SKOPE Gen2 Pegasus Horizontal 1/1 REMOTE 2 Door Prep Chiller (JH8302)




* Height excludes castors or legs.


CABINET DIMENSIONS				
	External	Internal		
Height:	751mm*	570mm		
Width:	1181mm	833mm		
Depth:	700mm 545mm			
Floor area:	$0.83 m^2$			

Dimensional tolerances Before installing this cabinet allow the following dimensional tolerances:				
Linear		Length of multiple cabinets		
dimensions dimensions		At each joint	At each end wall	
Less than 1 metre	±5mm	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	-5mm to +10mm	+15mm	

⁴ x 1/3 150mm deep pans

407

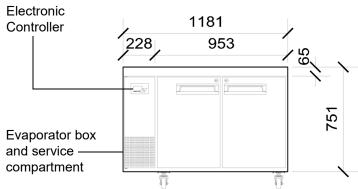



Copyright © 2008 SKOPE Industries Limited

Solid Swing Doors

CABINET SPECIFICATIONS

Refrigeration system: Electronic controlled, side mounted, remote refrigeration unit

Electronic controller: CAREL ir33 electronic controller

Refrigerant: Thermostatic expansion valve fitted to suit R134a/R404A/R452A

Pipe connection size: Liquid line: 1/4". Suction line: 3/8"

Remote refrigeration duty: 500 Watts @ -10°C SST

Cabinet internal volume: 260 litres

Insulation: 60mm thick, high density cyclo-isopentane polyurethane foam

Cabinet temperature range: +1°C to +5°C up to 30°C ambient

Drainage: Evaporator drain fitted inside service compartment (requires plumbing)

Electrical: 230-240 Volts a.c. 50 Hz, 3.71 Amps

Internal lighting: 1 x 5W T8 LED tube (Ø26 x 360mm) - Door activated

Internal door opening size: 2 door openings: 570mm high x 365mm wide

Doors:Solid stainless steel, self-closing doors (with key lock) - LH & RH hingedWorktop:Worktop accepts 4 x 1/3 150mm deep pans or 8 x 1/6 150mm deep pans

Shelves: Two levels of non-tip, adjustable tray slides and/or shelves per door

Weight: 130 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.







PSS0190 Rev 4.2 Nov. 2019