



## PG800HC

Pegasus Horizontal 2/1  
INTEGRAL, 3 Door, Fridge

### CABINET DIMENSIONS


	External	Internal
<b>Height</b>	771mm*	565mm
<b>Width</b>	2435mm	1935mm
<b>Depth</b>	828mm	650mm
<b>Floor area</b>	2.02m <sup>2</sup>	
<b>Gross volume</b>	750L	
<b>Net volume</b>	426L	

\* Height includes plinth and worktop (excludes castors and adjustable legs).

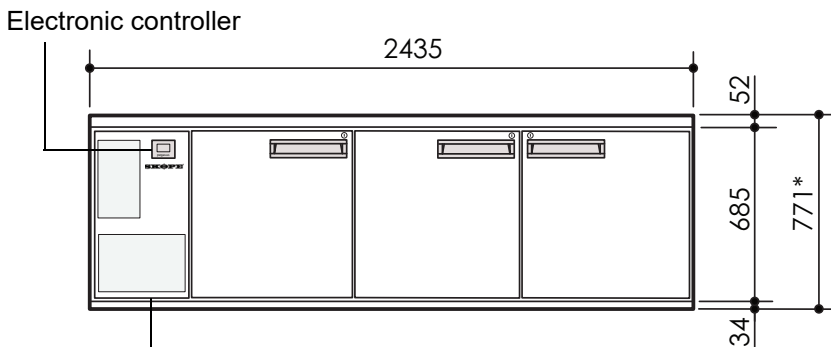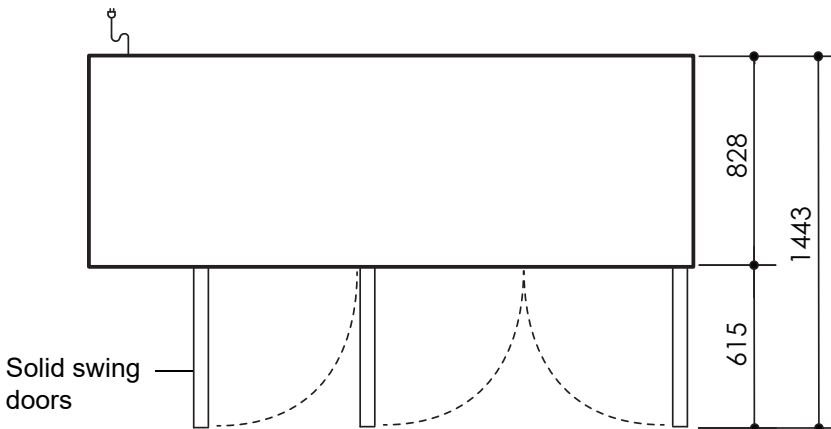

Side mounted integral refrigeration unit

Pictured with optional 50mm stainless steel worktop

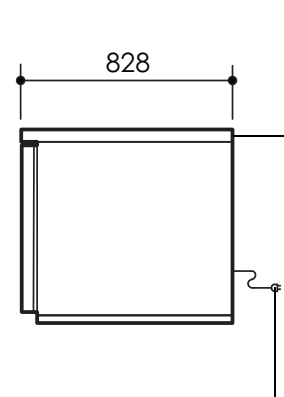


Power cord with 3-Pin plug

### CABINET SPECIFICATIONS

<b>Door</b>	Solid stainless steel, self-closing doors (with key lock) - LH, LH, RH hinged
<b>Internal door opening size</b>	3 door openings: 565mm high x 565mm wide
<b>Shelves</b>	Two levels of non-tip, adjustable tray slides and/or shelves per door
<b>Worktop (optional)</b>	Optional 50mm square edged stainless steel worktop
<b>Weight</b>	150 kg
<b>Electrical safety climate class</b>	5
<b>Internal lighting</b>	n.a.
<b>Electrical</b>	230-240 Volts a.c. 50 Hz, 3.67 Amps
<b>Temperature range</b>	+1°C to +4°C up to 40°C ambient
<b>GEMS class</b>	5M1
<b>GEMS energy consumption</b>	8.65 kWh/24h
<b>GEMS annual running cost</b>	\$948 p.a. (@ \$0.30/kWh)
<b>Refrigeration system</b>	Electronic controlled, side mounted, integral refrigeration unit
<b>Refrigerant</b>	R134a / 530g
<b>Nominal capacity</b>	599 Watts @ -10°C SST
<b>Insulation</b>	60mm thick, high density cyclo-isopentane polyurethane foam
<b>Drainage</b>	No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2012 SKOPE Industries Limited

PSS0199 Rev 2.3 Mar. 2021



PH: 08 9302 1299  
51 Paramount Dr Wangara WA 6065  
sales@practicalproducts.com.au  
www.practicalproducts.com.au

