

Two Solid Swing Door Upright Freezer

Range: ProSpec

SKOPE ID: PP2F

Dimensions: 1410 mm (W) × 865 mm (D) × 2185 mm (H)*

Capacity: 1266 L

* Height with castors is adjustable from 2185 to 2200.



Project:

Item #:



A solid-door GN2/1 upright freezer designed to store frozen food in restaurants, clubs, pubs, catered venues, and cafés. It is engineered to safely store frozen food from -18°C to -22°C (or adjustable via a smart-phone app from -12°C to -26°C) in ambient environments of up to 40°C. The body is made from 304 stainless steel covering 80mm thick polyurethane insulation. The solid swing door features a full height, formed door handle for easy opening and cleaning. The doors are fitted with built-in key locks, are self-closing, and have a stay open position at over 90°. Inside the freezer, there are LED lights, 10 × GN2/1 stainless steel wire shelves with removable shelf brackets, and coved corners for easy cleaning. The modular monoblock freezer cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output, and it can be easily removed in line with best practice for safe servicing of natural refrigerants. The freezer includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The freezer is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



ActiveCore Technology



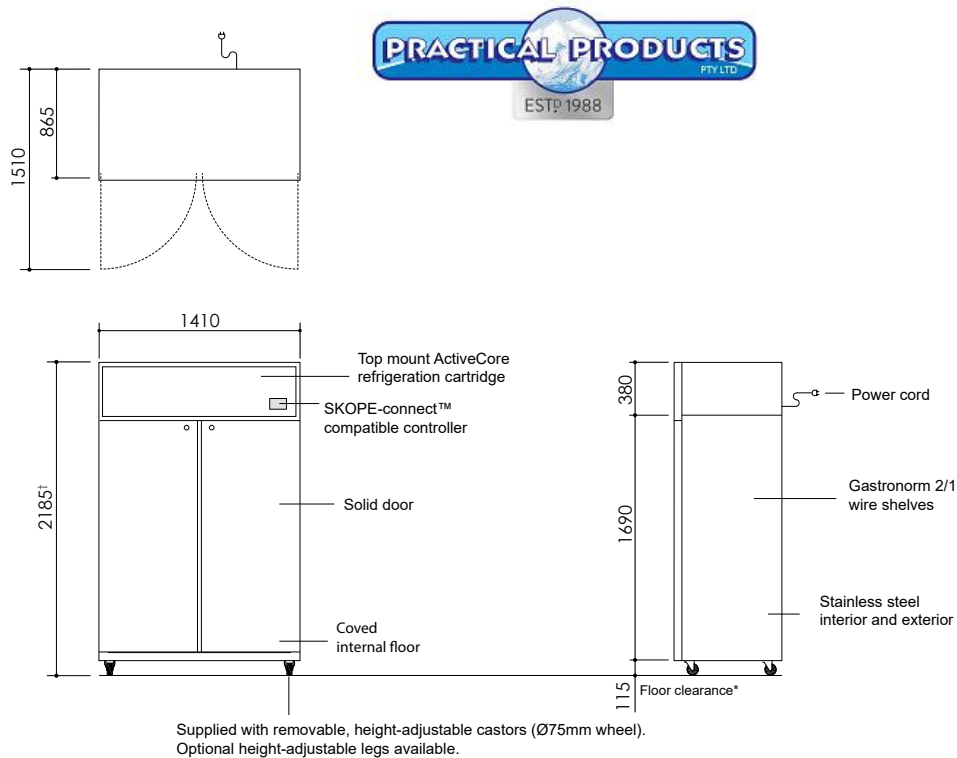
Natural Refrigerant



GEMS



SKOPE-connect

**Cabinet**

| | | | |
|-------------------|---|---|------|
| Type | Upright Freezer | | |
| Finish | 304 AISI stainless steel | | |
| Insulation | Type | PU foam | |
| | Thickness (mm) | 80 | |
| | Blowing Agent | Cyclo-iso Pentane (C5H10/C5H12) | |
| Doors | Type | 2 × self-closing, lockable, solid swing doors with stay-open position at over 90° | |
| | Opening Size | Height (mm) | 1500 |
| | | Width (mm) | 540 |
| Shelving | Ten adjustable height, stainless steel GN 2/1 shelves (530W × 650L) | | |
| Lighting | 2 × 1400 mm, 16 watt LED lights (door-activated) | | |

Dimensions†

| | External | Internal | Packed |
|-----------------------|--|----------|--------|
| Width (mm) | 1410 | 1250 | 1440 |
| Depth (mm) | 865 | 675 | 895 |
| Height (mm) | 2185 (std. castors) 2200 to 2245 (legs) | 1500 | 2235 |
| Weight (kg) | 260 | | 290 |
| Capacity (L) | 1266 | | |
| Footprint (m²) | 1.21 | | |

Ventilation (mm)

| | | | | | |
|------------|-----|--------------|--------------|-------------|--------------|
| Top | 300 | Sides | Not required | Rear | Not required |
|------------|-----|--------------|--------------|-------------|--------------|

Performance

| | | |
|---|--|----|
| Product Temperature Range (°C) | -21 to -18 (adjustable* from -26 to -12) | |
| Rated Ambient Temperature | 40°C/40% relative humidity | |
| Maximum Ambient Temperature (°C) | 40 | |
| Sound Level (dB(A)) | Standard | 66 |
| | Hush Mode* | 63 |

Greenhouse and Energy Minimum Standards (GEMS)

| | |
|----------------------------------|------------------------|
| Star Rating | 2 |
| Product Temperature Class | L1 (less than -18°C) |
| Total Energy Consumption | 14.89 kWh/24 h |
| Annual Running Costs | \$1,630 (@ \$0.30/kWh) |

Electrical

| | |
|-------------------------|--|
| Supply | 220-240 volts a.c., 50 Hz, single phase supply |
| Cord | 3 m power cord with 3-pin, 10 amp plug |
| Current draw (A) | 5.5 |

Refrigeration

| | | | |
|------------------------------|---|-----|----------|
| Controller | SCS Connect (SKOPE-connect™ compatible) | | |
| System Type | Removable cartridge | | |
| Cartridge Weight (kg) | 57.5 | | |
| Refrigerant/Charge | R290 / 137 g | | |
| Nominal Capacity (W) | 1250 | | |
| Heat Rejection (W) | Average | 620 | Peak 820 |
| Remote Duty | n.a. | | |
| Defrost Type | Hot gas defrost | | |
| Drainage | No plumbing required | | |



WA DEALER
PRACTICAL PRODUCTS PTY LTD

* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au