

Technical data sheet for

E31D4 ON THE SK2731N STAND

GN 1/1 Digital / Electric Convection Oven
on a Stainless Steel Stand



E31D4

Unit shall be a Moffat electrically heated Turbofan convection oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for four GN 1/1 pans and include a top grilling oven element and grill operating mode. The oven shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven control shall allow both manual and programmed operating modes and have separate control keys for selection of Grill mode, oven light function and timer operation. The unit shall include a halogen oven lamp. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand model SK2731N. Oven shall be fitted with a 15A cordset. Unit shall be supplied in 100% recyclable shipping packaging.

SK2731N

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for 600 x 400 trays and GN 1/1 pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E27M2, E27M3, E28M4, and E31D4. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES

- 4 Gastronorm GN 1/1 pan capacity
- 80mm tray spacing
- Compact 616mm depth x 810mm width
- 15A plug-in cordset fitted
- Digital display time and temperature controls
- Large easy view 20mm high displays
- Electronic thermostat control
- Electronic timer with countdown or time count modes
- Programmable for up to 20 programs
- Grill mode
- Single direction low-velocity fan
- 2.8kW heating in bake mode / 2kW grill elements
- Safe-Touch vented side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Stay-Cool door handle
- Vitreous enamel oven chamber
- Plug-in continuous oven door seal
- Halogen oven lamp
- Anti-skid 50mm dia. 76mm high adjustable stainless steel feet
- 4 oven wire racks supplied
- 100% recyclable packaging

ACCESSORIES

- Turbofan SK2731N Oven Stand

E31D4 GN 1/1 Digital / Electric
Convection Oven on a Stainless
Steel Stand

CONSTRUCTION

- Vitreous enamel fully welded oven chamber
- Stainless steel front, sides and top exterior
- Stainless steel oven fan baffle and oven vent
- Removable 4 position chrome plated wire side racks
- Oven grids chrome plated wire (4 supplied)
- Stainless steel frame side hinged door
- 5mm thick door outer glass
- 5mm thick low energy loss door inner glass
- Full stainless steel welded door handle
- Stainless steel control panel
- Aluminised coated steel base and rear panels

CONTROLS

- Electronic controls with digital time and temperature display,
- Manual or Program modes
- Large 20mm high LED displays
- Two individual time and temperature setting control knobs
- 6 function keys
- ON/OFF key
- Oven Lamp key (toggle or auto-time off mode settings)
- Timer Start/Stop key
- Grill mode quick select key
- Programs select key
- Actual temperature display key
- Adjustable buzzer/alarm volume
- Thermostat range 50-260°C
- Timer range from 180 minutes in countdown mode
- Timer range up to 999 minutes in time count mode for holding, slow cooking
- Over-temperature safety cut-out

CLEANING

- Stainless steel top and sides continuous exterior panel
- Vitreous enamel oven chamber
- Fully removable chrome plated oven side racks
- Removable vitreous enamel oven fan baffle
- Easy clean door system with hinge out door inner glass (no tools required)
- Removable plug-in oven door seal (no tools required)
- 76mm high stainless steel feet for easy access underside

SPECIFICATIONS

Electrical Requirements
230-240V, 50Hz, 1P+N+E, 3.1kW, 12.9A
15A cordset fitted

External Dimensions

Width 810mm
Height 625mm including 76mm feet
Depth 616mm

Oven Internal Dimensions

Width	565mm
Height	425mm
Depth	395mm
Volume	0.09m ³

Oven Rack Dimensions

Width 540mm
Depth 370mm

Nett Weight (E31D4)
53.8kg

Packing Data (E31D4)

68.2kg
0.45m3
Width 740mm
Height 720mm
Depth 835mm

SK2731N Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan
 E27, E28 and E31 Series model ovens
 6 position tray runners standard
 76mm diameter wheel swivel castors standard with
 2 front castors with dual swivel and wheel lock
 Welded 38mm and 32mm square tube front and rear frames
 Welded rack supports/side frames
 Top frame oven supports suit Turbofan E27, E28 and E31
 Series oven mounting
 Supplied CKD for assembly on site

External Dimensions (SK2731N Oven Stand)

Width	810mm
Height	880mm
Depth	650mm

Nett Weight (SK2731N Oven Stand)
19.5kg

Packing Data (SK2731N Oven Stand)


22kg
0.11m3
Width 830mm
Height 900mm
Depth 152mm

INSTALLATION CLEARANCES

Rear	25mm
LH Side	25mm
RH Side	25mm

CL FARRANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required

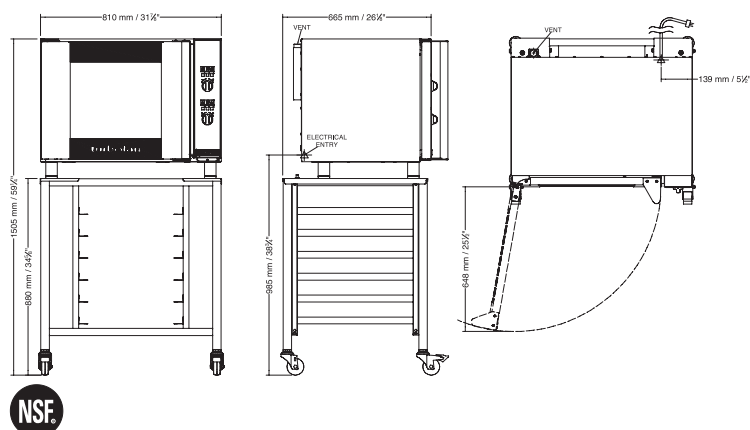

WA DEALER
PRACTICAL PRODUCTS PTY LTD

PH: 08 9302 1299
51 Paramount Dr Wangara WA 6065
sales@practicalproducts.com.au
www.practicalproducts.com.au